



**UNDER WATER SENSOR NETWORK SYSTEM TO ACQUIRE THE
OFFSHORE DATABASE USING WIRELESS COMMUNICATION**

**SOMU K^{1*}, MUDE SREENIVASULU², ARUN M³, ARUNCHAKRAVARTHY R⁴,
SURESHKUMAR C⁵, AND SENTHIL R⁶**

-
- 1:** Associate Professor in Electronics and Communication Engineering, Mahabarathi Engineering College Chinnasalem, Kallakurichi Dt., Tamilnadu, India
- 2:** Associate Professor in Electronics and Communication Engineering at Samskruti College of Engineering and Technology, Ghatkesar, Hyderabad, TS, India
- 3:** Associate Professor in Department of Electronics and Communication Engineering at KGiSL Institute of Technology, Saravanampatti, Coimbatore Tamil Nadu, India
- 4:** Associate Professor in Information Technology at KGiSL Institute of Technology, Saravanampatti, Coimbatore, Tamil Nadu, India
- 5:** Assistant Professor in Information Technology at KGiSL Institute of Technology, Saravanampatti, Coimbatore Tamil Nadu, India
- 6:** Assistant Professor in Information Technology, SRM Institute of Science and Technology, Delhi-NCR Campus, Delhi - Meerut Expy, Modinagar, Uttar Pradesh, India

***Corresponding Author: Somu K; E Mail: somu.pgp@gmail.com**

Received 20th July 2021; Revised 22nd Aug. 2021; Accepted 30th Sept. 2021; Available online 1st Nov. 2021

<https://doi.org/10.31032/IJBPAS/2021/10.11.1037>

ABSTRACT

This conventional technique for obtaining marine data, which depends on the deployment of charging devices holding technology to capture data for later recovery, has a number of flaws that may be remedied by using the Undersea Wireless Sensors system. The current research looked at the feasibility of using an undersea wirelessly sensing system to acquire deep sea data. Auditory route limitations were discussed, as well as the feasibility of this sort of infrastructure for one important application: deeper ocean present surveillance. These also provide as a means of synchronizing the Submarine Wireless Sensing Networks in response to changes in sea level.

Keywords: Deeper sea flow measurement; UWSNS; auditory link

INTRODUCTION

Because of the significance of such a sea for various elements of life, there seems to be a growing interest in obtaining oceanography information. Transportation, seafood, habitat, climate impact, as well as assistance for offshore oil development, seem to be just a few categories. Despite occupying over 70 percent of the Planet's surface, the seas were only understood in terms of size, information gathering challenges, as well as the massive price of seafaring instruments as well as activities [1]. The conventional data collection method as well as sea surveillance relies on a collection of devices housed in a specific signal that runs on charges. That platform was installed in the sea near the point of attention as well as continues to collect information for the life of the program, which could have been many times, months, or even years [2]. The platform was retrieved at the finish of the fixed time for data transmission, analysis, as well as assessment. Such a process of information acquirement was being used for a lengthy moment, though it has several disadvantages: it still is reduced to a particular stage of research study, it would not permit for information quality surveillance even during the task, that has low capacity, as well as the acquiring variables should be set at the start of the

match and should remain untouched there until the job was complete. Furthermore, the devices' integrity cannot be assured during the operation. They usually realize just towards the conclusion of the operation that certain devices had died as well as no information was already gathered. Regarding seawater, there have already been trials attaching cables from the monitoring platform to airwaves sensors connected to transfer sensor information to an on-site location within actual time, and yet this approach has still been confined to one sample stage [3-5]. Moreover, major telecom connections restrict activities for depth of sea applications. Although has been suggested as a solution for a variety of applications, caution should be exercised in assessing its practicality [6]. First and foremost, there is an issue with the storage device. Despite submarine transmission could be achieved via optical or electromagnetic radiation, sound communication is the most effective method for Underwater sensor networks. As an outcome, the constraints of the comparable to the wavelength should be factored into the project development plan. They examine these restrictions under this work as well as explain that underwater sensor networks can be used to detect ocean flux [7]. Strongly dependent on the

climate as well as the strategy and implementation of oil underwater research, ocean flow surveillance was among the most significant submarine variables. Even for depth of sea settings, they present a mechanism for component synchrony depending on tide variations. The alignment of Underwater sensor networks was difficult [8]. The existing approaches are based on energy-intensive regular sound data transmission among nodes in the network [9]. Every Underwater sensor networks stations could quietly observe sea oscillations to provide approximate yet acceptable synchrony.

Literature survey

Underwater sensor networks were made up of rechargeable batteries components including devices and network capabilities. The units could connect wirelessly with each other to exchange information as well as orders. Such connections could be made up of end devices, node mobility, or even a combination of both. [10] provides a nice overview of these alternatives. underwater sensor network components could be organized in a 2-dimensional architecture, including all units sitting on the seabed, or in a 3-dimensional architecture, including clusters at various depths, every secured to the seabed using wires. Throughout this instance, a buoy was bound to maintain the

cluster airborne as well as the hook wire extended. An underwater sensor network could be used to analyze information in real-time, including devices connecting with a command center throughout all periods [11]. This form of functioning wastes quite so much power during communications, because it is only perfect for smaller usage, especially if the packets of information were huge and created at a rapid pace. Delay-tolerant networking has been used in another way of management. Therefore in-network, the units maintain a self-contained data capture function till a mobile node visits them regularly to collect their information. That procedure requires less power and it is well adapted to lengthy gathering data given the lack of lengthy communications [12]. The device elements were organized together around the end device throughout this basic design, either transfer sensory information to it if it is near sufficient, either forward or pass the information from some of the other units being further away. The sink node features 2 channels of communication, one for information exchange among sensor devices and another for upward connection with an ocean temperature portal [13]. That entrance could be connected to a ground platform through a transceiver, by which it is capable of monitoring as well as manage the information gathering of all units.

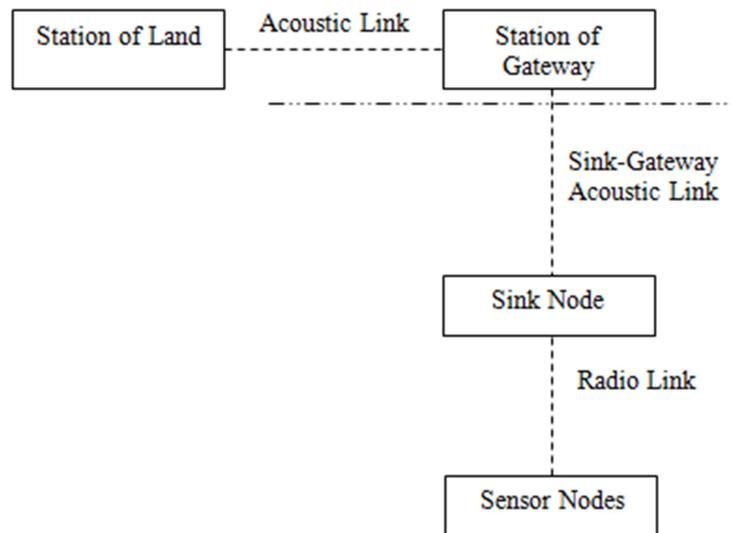


Figure 1: A typical UWSN's architecture

Even though underwater sensor network units could be linked using copper cables or fiber optics, such an option was inappropriate among most purposes because it reduces design versatility, limits network architecture to two dimensional, as well as necessitates unique interfaces as well as insulating layers. It would have been hard to constantly cut and paste units in just such a cabled underwater sensor network, particularly in places with the highest exploration and development and barriers. Therefore, even with this architecture, an underwater sensor network requires wireless connectivity that is functional and easy to install and manage. Visual, electric and magnetic, or sound energy could all be used for submerged wireless technology. Retinal as well as electric and magnetic interactions beneath saltwater were feasible, although

they have significant limitations that make them unsuitable for underwater sensor network purposes shown in **Figure 1**.

Absorption owing to medium assimilation would be the fundamental disadvantage of magnetic propagation in saltwater. The resistance rises with wavelength, as well as the required energy for magnetic transfers makes them unsuitable for realistic underwater sensor networks purposes at even shorter wavelengths.

Despite its quick information speeds as well as low energy consumption, visual communication under saltwater does have the disadvantage of being limited in the distance caused by light reflection and absorption. Optical communication system ranges could be as little as just one-hectare relation to water quality, and in pure saltwater, the effective frequency of visual

communications would only be a few inches. Moreover, sometimes at small distances, accurate synchronization of the transmission and reception was required for effective transmission. Vision communications were only ever viable for underwater sensor network applications that could also endure the constraints of Delay-tolerant networking, as described in [14].

Sound transmission has been the most practicable way for underwater communication as well as, as an outcome, the most commonly employed in underwater sensor networks implementation. Despite this, the sound route does have constraints, such as negligible speed of sound, poor & way away capacity, as well as energy requirements.

While evaluating the viability of underwater sensor networks' implementation, certain restrictions must always be considered. Furthermore, since sound communications under liquid vary from microwave broadcasts throughout the wind, technologies developed for surface wireless communication may not have been suitable for marine applications. The speed of sound in the ocean was roughly 1,500 m/s, which is much more than 4 times higher than the operating frequency in wind yet five times greater slower than electromagnetic velocity. This property causes

sonic transmissions to have a large delay (about 0.67 s/km), which was among the most challenging aspects of underwater sensor networks operation. As a result, underwater sensor networks communication protocols are challenging to develop, significantly about Intermediate Authentication Mechanism. This also makes it harder to create systems that depend on message transmission. Water's audio velocity was varied, based on compression (deep), volume, warmth, as well as saline, in addition to becoming poor. The velocity profile in oceans changes out from high to low concentration as per a shape called the noise velocity range due to a mixture of these factors. Power spreading, as well as acoustic performance, generates signal attenuation. The damage resulting in energy dispersion was proportional to the distance between the transmit and receive, while absorbed damage additionally rises with speed. Sound level dominates the deep water, as well as its spectrum of the signal, was thought to diminish at a rate of 20 dB per year. That property restricts the effective range between input and output to just a few kilometers as well as communication wavelengths towards less than 30 kHz. Because of the short wavelength & small spectrum, the actual rate of infection is often less than 10 kbps. As an outcome of

such a property, simple multicast broadcasts are becoming more power-saving than lengthy yet other communications for underwater sensor networks.

Constraints on power

Another major consideration in underwater sensor transmission was power usage. The underwater sensor networks nodes were fully charged, as well as the required energy for underwater communication broadcasts was significantly greater than that for conventional radio broadcasts. Sound waves were dependent on a seismic wave of simultaneous cardiopulmonary resuscitation as well as pressure waves in liquid; therefore communications require a lot of energy. Moreover, replacing or charging a charger, which would be a simple process in earthly sensing devices, was extremely complicated and costly in underwater sensor networks. As a result, it's critical to reduce communication damages suffered by communication conflicts, as this type of power loss was much more destructive than in earthly sensing devices. As an outcome, Time Division Multiple Access would be a popular mechanism for intermediate network access in underwater sensor networks. Time Division Multiple Access consists of assigning a specific time to every system

unit communication on a cyclic basis. The route was allocated for the communication of just one station through every period. A frequency keeper gap between periods should be adequate to prevent communications from duplicating. A required standard of system synchronization should be assured for such a strategy to perform, as well as the duration frame was determined by the accuracy of this synchronization as well as the total range among units.

Requirements for Applications

Some prerequisites for a gathering data program to somehow be safely executed with an underwater sensor network can be present at all times here on revealed auditory multichannel constraints.

Initially, researchers should consider this, while cautious, a 5 kbps data transfer rate has been the maximum bound on actual transmitting. Faster speeds are possible, though under particular circumstances as well as for small distances. Depending on the situation as well as the surrounding factors, even 5 kbps may not have been possible. The connectivity of network nodes in underwater sensor networks has already been examined, however, it remains a concern. They could be beneficial in Delay-tolerant networking implementations, as suggested by [15], however for clarity, permanent cluster

implementations were preferable. The system base station length should be maintained within 5 km, or fewer if feasible, because of the route capacity reliance on origin length. Greater distances, in addition to assuming a smaller spectrum, necessitate greater signal strength and might even subject communications to range disturbance, compromising effective communication. Also, it is desirable to employ multicast methods to convey information from further nodes in the network to sensor nodes, rather than delivering their information straight to it, due to transmission limitations as well as energy-saving concerns. That necessitates the development of improved network architectures, yet the energy cost is worthwhile. Moreover, because we're dealing with base stations, a stable scheduling algorithm can be used till the suitable route optimization method for such a network was found.

Researchers must also keep in mind that the volumes of information to be communicated must be little in terms of compatibility only with the given available bandwidth. Smaller bundles have a better chance of being delivered correctly than bigger sizes. Each packet of information can convey a great amount of knowledge from sensing devices as well as be sufficient for a variety of uses. To achieve

adequate sustainability in terms of the number of feasible devices in the system, tiny packages must also be produced at a high enough frequency. For too many information-gathering needs, just one sampling interval could be adequate. Particular groups coupled with low packet rates allow for an effectual Time Division Multiple Access systems with huge sufficient period defender interims to protect intersecting communications as well as decrease the chances of network congestion. The system adaptability in the number of concurrent feasible units in the underwater sensor networks will also increase as the proportion of message as well as packet-size increases.

Sea current Monitoring in Underwater Sensor Networks Application:

Sound Ultrasonic Present Analyzer device would be used to monitor ocean currents. This measurement of acoustic diffraction on the colloidal matter in water movement has been used to determine tidal currents. Because of the Frequency modulation of these bounces, exact assessments of liquid speeds across various layers of ice passing the ADCP's sound waves are possible.

Such device was generally attached to the seabed, as illustrated in **Figure 2**, and therefore is set to test the flow of water above this one at predetermined intervals

until ADCP was retrieved as well as its information transferred for visualization and interpretation. 1 hr would be a usual sample mean for this type of information. Every one of these items was encapsulated in a packet header of less than just Kbyte.

Imagine a scenario in which there are 12 sites, including an ADCP as well as

a sound transmitter, as depicted in **Figure 3**. The actual distance among neighbor nodes in this situation would be about 5 kilometers. The possible frequency band for a transceiver radius of 5 km is roughly 10 kHz, resulting in a communication frequency of up to 5 kbps.

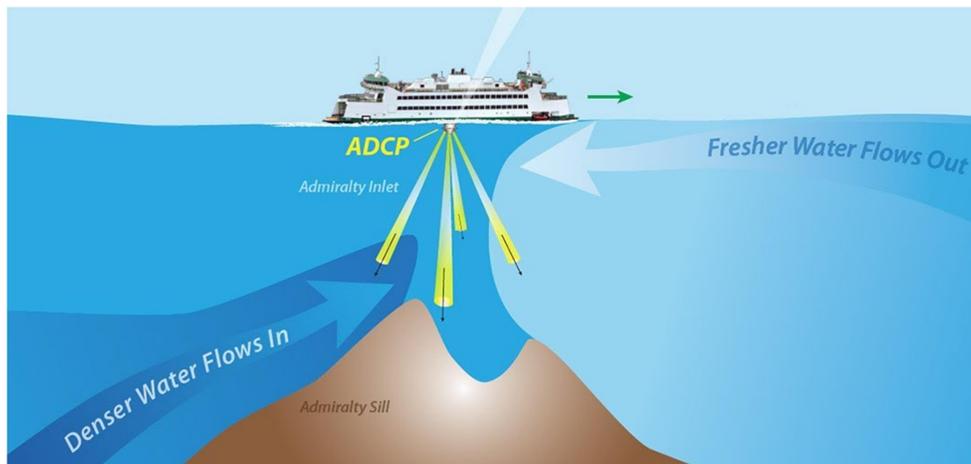


Figure 2: ADCP operation at the seashore

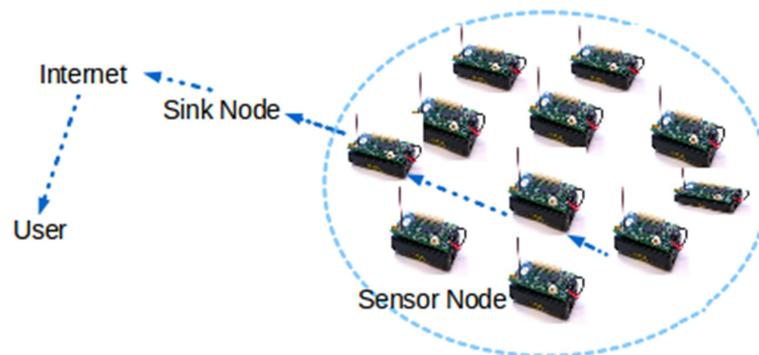


Figure 3: Example of a UWSN Scenario

Those developments – for the observation of water current throughout a 196 km² square region, which is a very plausible possibility. Vertices 4, 5, 8, as well as 9, were only ever one step away

from the mobile sink, while the rest are 2 leaps away. A Packet Transmission Time was calculated only using incoming packets as well as an available bandwidth of 5 kbps.

$$\begin{aligned} \text{Packet Transmission Time} &= \frac{(500 \times 4 \text{ bits})}{2500 \text{ bits/s}} \\ &= 0.8 \text{ s} \quad (1) \end{aligned}$$

As the nodes distances are 2.5KM, The Travelling Time will be:

$$\begin{aligned} \text{Travelling Time} &= \frac{2500 \text{ m}}{750 \text{ m/s}} \\ &\cong 1.75 \text{ s} \quad (2) \end{aligned}$$

Thus the Total Transmission Time (TTT) of one packet over one hop is

$$\begin{aligned} \text{Total Transmission Time} &= \text{Packet Transmission Time} \\ &+ \text{Travelling Time} \\ &+ 1.75 \text{ s} \cong 2.5 \text{ s} \quad (3) \end{aligned}$$

If we choose a security margin of 10% to define the TDMA Time Slot (TS) necessary for the transmission over one hop, then we have:

$$\begin{aligned} \text{Time Slot} &= \text{Total Transmission Time} \times 0.6 \\ &= 3 \text{ s} \quad (4) \end{aligned}$$

They should consider that the Total Time Slot of all nodes in the Underwater sensor networks should be the double Time Slot because they have nodes that are 2 hops from the sink. For every node, this period might be considered a route reservation time. As a result, assuming a 20percentage security margin, the Total Time Slot will be 12 sec.

Nonetheless, a time guard interval should be utilized to divide the one-time slot from the next. To be compatible include the tidal synchronization discussed in section SYNC in Underwater sensor networks, we set Time Guard Interval to one min. Then they conclude that every node would only require 1 min and 12 secs

to transfer their information to the sink node, either directly or via 2 hops. Because there are 12 nodes in this situation, the overall allocation route time required to deliver all nodes' information to the sink node is 14 mins & 24 secs.

When all of the packets by all nodes have been received, the sink node may combine them into a single 12-byte packet & transmit it to the gateway via the vertical acoustic route. If the rate of transmission between the sink node as well as the gateway terminal is 5 kbps, the Period from Sink to Gateway (Time Slot Gateway) transmission would be:

$$\text{Time from SG} = \frac{(6000 \times 4 \text{ bits})}{2500 \text{ bits/s}} = 8.6 \text{ s} \quad (5)$$

If the Sink node is located at a deep of 2,000 meters, the Journey Time between Sink -Gateway (Total Time Slot Gateway) would be:

$$\text{Travel Time from SG} = \frac{1000 \text{ m}}{750 \text{ m/s}} = 0.65 \text{ s} \quad (6)$$

Then, the total time spent to send the data of all nodes from Sink to Gateway is 20.52s.

They can slice this transmission into smaller packets to lower the packet defect probability because we only require 20.52 secs and will have more than 40 mins to convey that information to the gateway.

At the start of every series, 2-time slots could be introduced to allow

communication from Ground Terminal to a sink node, as well as from the sink node to any of the Underwater sensor networks nodes, to deliver orders & controls to an ADCPs.

Although with the wide security margin for every node transmission as well as the cautious Time Guard Interval selected, the link will be inactive for the majority of the time because we only require less than 20 mins for all communications.

Although if we require to reduce a transmission rate to 2.5 kbps, the problem will remain the same because they chose a Time Guard Interval that is considerably higher than the Total Time Slot.

There is no way for the transmitting node to know whether or not the communication was successful in this technique. To increase communication in a noisy environment, we can include an information exchange among transmitter & recipient nodes.

A basic hand-shake might be implemented to improve things: after delivering a packet, the transmitter waits for an acknowledgment from the recipient. When it does not receive the Acknowledgment before a certain time-out, it will attempt up to two re-transmissions before giving up. This hand-shake is depicted in **Figure 4**.

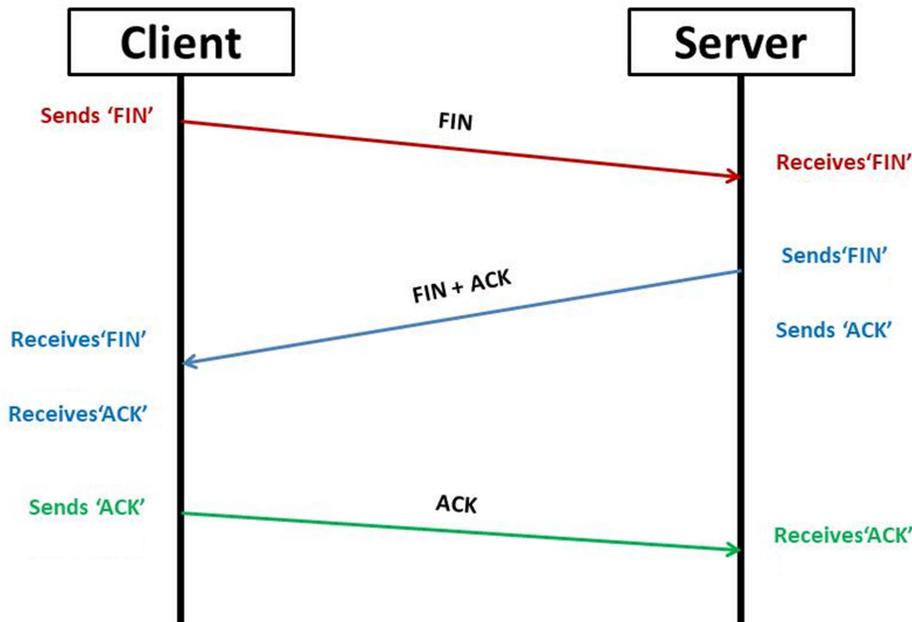


Figure 4: Handshake functioning with a high level of reliability

Because every ACK time frame, this additional hand-shake has no influence just on the app's viability. The communication adds just 3.33 secs to every

rise is insignificant because the period guard interval is such min. If a ground channel fails to receive information from a particular node or a group of nodes within its time frames, this leads to failure, which might also result in a maintenance alert. The overall resource scheduling period would be extended to about 26 mins if time frames of one min are used (in the worst scenario, all node sends every of their information tree times), which is well supported for the underwater sensor networks application under consideration.

However, because one of the most critical needs of practical Underwater sensor networks is power efficiency, this hand-shake should be avoided and only utilized when necessary, even as sending ACKs for every received packet consumes power in an Underwater sensor networks nodes. Routing in Underwater sensor networks is currently a work in progress. For upgrade routing information & maintain connection status, the majority of the concepts require regular information exchange among all nodes of Underwater sensor networks. This wastes power and puts the network's functionality at risk. As a result, the nodes in this app are in fixed places. Node 4 is, for example, configured to forward information received via node 1 & 6 to a sink node. Static routes are

appropriate because the situation is unlikely to change frequently.

CONCLUSIONS

They examined major auditory circuit concerns that should be considered while using underwater sensor networks for depth sea information gathering in this paper. Stable nodes, small information speeds up to five kbps, small node to node lengths as short as 5 kilometers, compact information packets as small as 1 byte & 60 minutes of information acquisition frequency are all important qualities to look for because when selecting apps for a workable Underwater sensor networks. We've shown that depth sea present monitoring with ADCP apparatus meets those criteria &, as a result, is a viable application of Underwater sensor networks. We've shown that depth sea present monitoring with ADCP apparatus meets those criteria & as a result, is a viable application of Underwater sensor networks. Because of the large ratio among packet interval production & packet volume with this scenario, a safe time division multiple access approaches can be used to access various mediums without wasting power due to transmission conflicts. This methodology can be used to analyze other deep-sea information acquisitions that include similar features. They also presented a strategy based upon

tide observation to provide a crude but effective synchronization mechanism.

REFERENCES

- [1] Islam T, Park SH. A comprehensive survey of the recently proposed localization protocols for underwater sensor networks. IEEE Access. 2020 Sep 30.
- [2] Fei W, Hexiang B, Deyu L, Jianjun W. Energy-efficient clustering algorithm in underwater sensor networks based on fuzzy C means and Moth-flame optimization method. IEEE Access. 2020 May 25; 8: 97474-84.
- [3] Gul H, Ullah G, Khan M, Khan Y. EERBCR: Energy-efficient regional-based cooperative routing protocol for underwater sensor networks with sink mobility. Journal of Ambient Intelligence and Humanized Computing. 2021 Jan 3: 1-3.
- [4] Dr.P.Sivakumar, "Analytical framework to build predictive and optimization function from manufacturing industry sensor data using cross-sectional sharing", Big Data, 2021 (SCI)
- [5] Dr.P.Sivakumar, "Improved Resource management and utilization based on a fog-cloud computing system with IoT incorporated with Classifier systems", Microprocessors and Microsystems, Jan 2021 (SCI).
- [6] Ranjeeth, S., Latchoumi, T. P., & Paul, P. V. (2020). Role of gender on academic performance based on different parameters: Data from secondary school education. Data in brief, 29, 105257.
- [7] Alfouzan F, Shahrabi A, Ghoreyshi SM, Boutaleb T. An efficient scalable scheduling MAC protocol for underwater sensor networks. Sensors. 2018 Sep; 18(9): 2806.
- [8] Renner BC, Heitmann J, Steinmetz F. ahoi: Inexpensive, low-power communication and localization for underwater sensor networks and μ AUVs. ACM Transactions on Sensor Networks (TOSN). 2020 Jan 29; 16(2): 1-46.
- [9] Ma H, Teng J, Hu T, Shi P, Wang S. Co-communication protocol of underwater sensor networks with quantum and acoustic communication capabilities. Wireless Personal Communications. 2020 Jul; 113(1): 337-47.
- [10] Xie P, Cui JH. R-MAC: An energy-efficient MAC protocol for underwater sensor networks. international Conference on Wireless Algorithms, Systems and

-
- Applications (WASA 2007) 2007 Aug 1 (pp. 187-198). IEEE.
- [11] Hsu CC, Lai KF, Chou CF, Lin KJ. ST-MAC: Spatial-temporal MAC scheduling for underwater sensor networks. In IEEE INFOCOM 2009 2009 Apr 19 (pp. 1827-1835). IEEE.
- [12] Cai S, Zhu Y, Wang T, Xu G, Liu A, Liu X. Data collection in underwater sensor networks based on mobile edge computing. IEEE Access. 2019 May 22; 7: 65357-67.
- [13] Liao WH, Huang CC. SF-MAC: A spatially fair MAC protocol for underwater acoustic sensor networks. IEEE sensors journal. 2011 Nov 22; 12(6): 1686-94.
- [14] Alfouzan FA. Energy-efficient collision avoidance MAC protocols for underwater sensor networks: Survey and challenges. Journal of Marine Science and Engineering. 2021 Jul; 9(7): 741.
- [15] Karim S, Shaikh FK, Chowdhry BS, Mehmood Z, Tariq U, Naqvi RA, Ahmed A. GCORP: Geographic and cooperative opportunistic routing protocol for underwater sensor networks. IEEE Access. 2021 Feb 10; 9: 27650-67.